

PFW

TECHNICAL FEATURES

Exceptional gloss // High concentration // Easy to use



Wood



Pigment



Water



Covering

DESCRIPTION / PFW are water-based fluorescent pastes ready to use.


UTILIZATION / They have been studied for fluorescent effects of strong impact.
Spray or roller application on white support.

MISCIBILITY / Compatible with polyurethane resins, acrylic and all aqueous systems. The products of PFW series are miscible with each other in any ratio to allow you to independently create new customized solutions.

OVERPAINTING / Can be over-painted with two-component glossy top-coats

SPRAY AND ROLLER APPLICATION / In order to obtain the best effect add 10-20% of PFW to the top-coat then apply by spray or roller on white support.

WATER-BASED FLUORESCENT PASTES

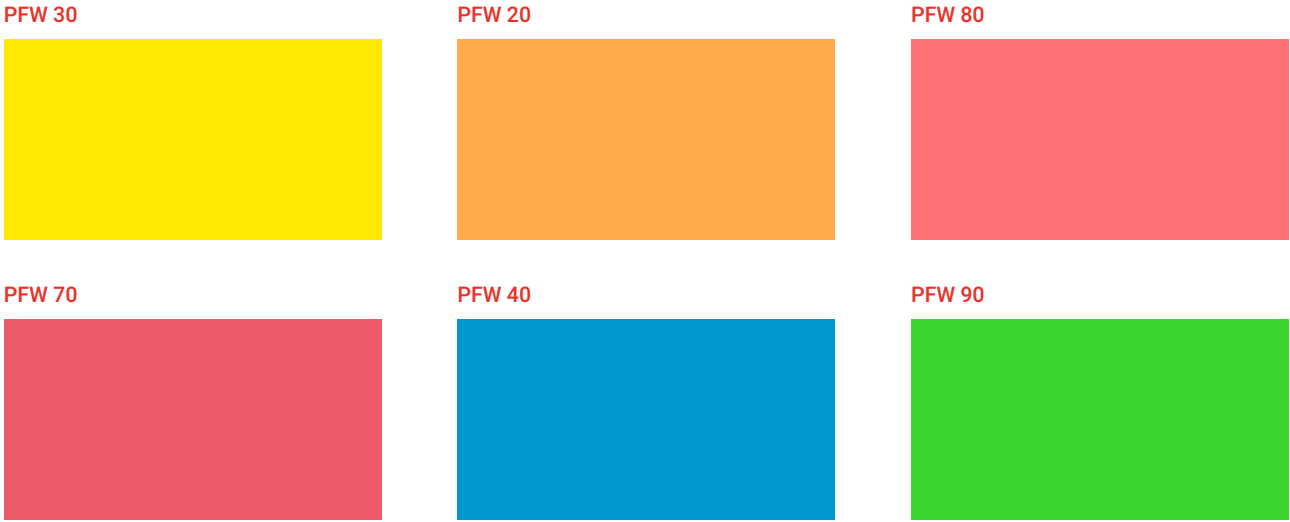

CODE	DRY MATTER	DENSITY	SOLUBILITY			LIGHT FASTNESS
			WATER	PM	ACETONE	
PFW 20	55 ± 3%	1,20 Kg/l ± 2%	+	-	-	3
PFW 30	55 ± 3%	1,20 Kg/l ± 2%	+	-	-	4
PFW 40	55 ± 3%	1,20 Kg/l ± 2%	+	-	-	4
PFW 70	55 ± 3%	1,20 Kg/l ± 2%	+	-	-	3
PFW 72	55 ± 3%	1,20 Kg/l ± 2%	+	-	-	3
PFW 90	55 ± 3%	1,20 Kg/l ± 2%	+	-	-	3

Table legend: -- no - poor -/+ fair + good

* Colors are only for illustrative purpose and may differ slightly from real tones